



ROTOMATIC RM-202

**BX, MC & FLEX MOTORIZED
BENCH TOP CUTTERS**

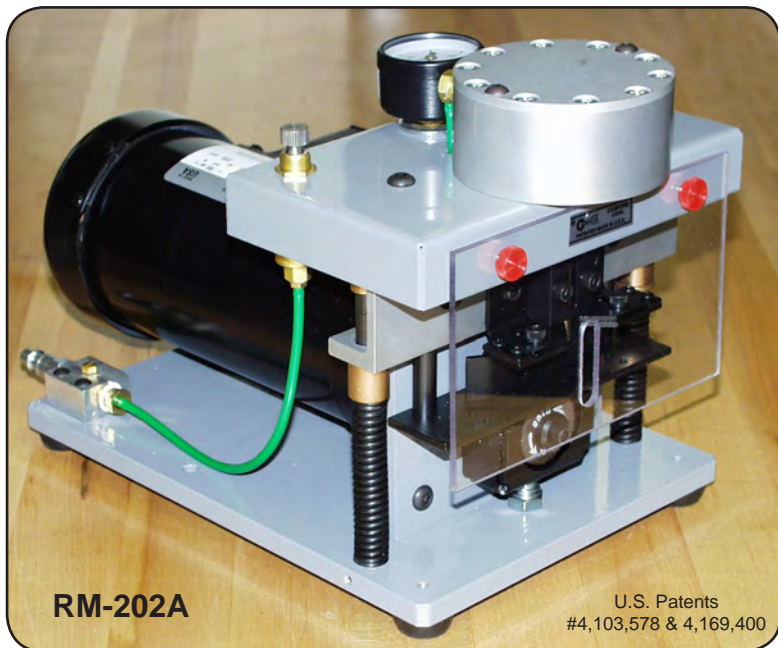

RM-202A

U.S. Patents
#4,103,578 & 4,169,400

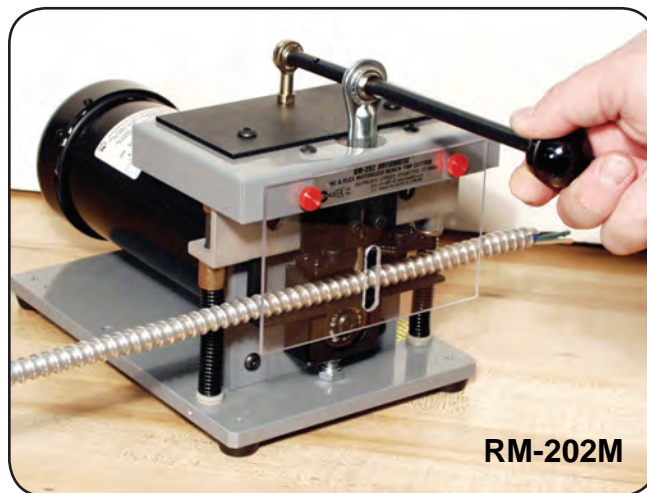

RM-202M

The heavy-duty ROTOMATICS are the culmination of years of experience in armored cable cutting technology and are used in the production lines of all major armored cable manufacturers

CUT COSTS! INCREASE OUTPUT!

The ROTOMATIC drastically cuts labor time insuring clean, fast stripping without damaging the wire inside the cable. Never use a hacksaw again! The open channel construction allows cutting or stripping **anywhere along the cable**. The heavy-duty production Rotomatics are available with either manual or air actuated clamping systems. The RM-202A uses a large air cylinder to provide smooth and fast cutting action while also preventing operator's fatigue. **Simply pressing a button sends the clamping pin down which in turn drives the cable over the power cutting wheel, splitting the armor casing.** To remove the armor just **untwist the cable and the casing slips off!** An adjustable limit stop permits varying the depth of cut for different cables. The RM-202M with a manual lever is ideal when compressed air is not available.

- Ideal for making "Whips" & stripping MC/BX cable in precut lengths
- Great for contractors doing on site finishing work
- **Eliminates deburring** and nicking of wires
- The open channel construction allows cutting or stripping **anywhere along the cable**
- Equipped with a top quality gear-motor for extra-long life.
- Adjustable cable guide allows lateral adjustment for different cable pitches
- Other features include fast circular cutter replacement, safety shield, and lateral cable **clamping pin adjustment** for different cable pitches


LIMITED WARRANTY: The Rotomatic 202 is guaranteed to be free from defects in workmanship and material for 90 days from date of original purchase.

* Flex & AWG cable sizes vary from manufacturer to manufacturer, confirm size by measuring actual O.D.

ROTOMATIC CABLE RANGES	Model	Flex Range*	Standard Pin	Optional	AWG Range*	O.D. Range
	RM-202A	3/8" TO 1/2"	3/8" LP-269	1/2" SP-233	#14-2 TO #4-4	0.42" TO 0.92"
	RM-202AA	3/8"	-----	-----	#14-2 TO #8-3	0.42" TO 0.60"
	RM-202M	3/8" TO 1/2"	3/8" & 1/2" MP-269	-----	#14-2 TO #4-4	0.42" TO 0.92"
	RM-202B	3/8 TO 3/4"	3/4" SP-218	3/8" LP-269 1/2" SP-233	#14-2 TO #2-4	0.42" TO 1.10"
	RM-202C	3/4" TO 1-1/4"	1-1/4" SP-233	3/4" TO 1" SP-300	#4-4 TO #1-4	1.00" TO 1.70"

PROMOTE SAFETY!

The front of the ROTOMATIC is protected by an unbreakable plexi-glass shield. To insure safe operation the adjustable blade guard is integral to the cutting action and depth of cut setting on the RM-202. The clean cut parallel to the cable axis **eliminates deburring** of flexible conduit ends. This feature prevents damage to the wire's insulation caused by sloppy manual deburring. For best results we recommend the use of screw clamping and squeeze type connectors. (Check your local electrical code)

	B-108	BLADE FOR ALL ROTOMATIC MODELS
--	-------	--------------------------------

- RM-202A, B & C require 40 psi air pressure. Each machine includes a pressure regulator, air gauge & large valve actuator.
- RM-202A cuts 3/8" Flex and 1/2" Flex with pin **SP-233**.
- RM-202M cuts both 3/8" & 1/2" Flex with pin **LP-269**. Uses a manually actuated lever to clamp & cut the cable
- RM-202B cuts 3/4" Flex with pin **SP-218**, 1/2" Flex with **SP-233**, and 3/8" Flex with pin **LP-269**.
- RM-202C cuts 1-1/4" Flex with **SP-233**, 3/4" & 1" Flex with **SP-282**
- Dimensions: 8"H x 7"W X 11"D, 22 lbs., 115 VAC.
- Accessories: B-202 Replacement Blades

**DUE TO THE INCREASE IN PRODUCTIVITY
THE ROTOMATIC PAYS FOR ITSELF
MANY TIMES OVER IN A SHORT TIME**



392 PACIFIC STREET, STAMFORD, CT 06902
PHONE 203-324-0067 ☆ www.DCL-Tech.com

All brands & product names are trademarks or registered trademarks of their respective companies